


Technical data

Average fill factor	0,54
average spinning loss factor	0,84
Core	fibre core
Lay direction	choice of right hand or left hand
Compacting	not compacted
Finish	choice of bright or galvanised
Rope diameter tolerance	0/+4%
Standard	According to EN 12385-4

Diameter range	Number of load-bearing wires in the external strands	RCN according to ISO 4309
from 16 – 42	144	06



WARNING: Never use with a swivel – failure to comply may result in serious damages and injuries

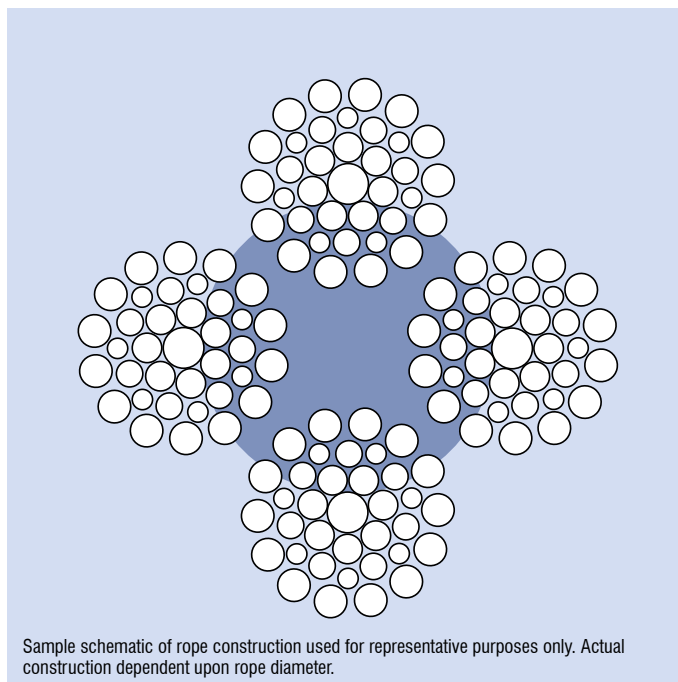

Nominal rope Ø	Weight approx.	Minimum breaking force F _{min} 1960
mm	kg/100 m	kN
16	99,5	183
18	124	231
20	151	285
22	188	345
24	226	407
26	256	477
28	305	554
30	349	635
32	396	723
34	437	816
36	497	900
38	550	1029
40	616	1152
42	683	1275

Other rope diameters and constructions on enquiry.

Please refer to our operating manual stranded ropes! Available at www.pfeifer.info/manual-strand-ropes